

 **sallén**



Sallén Obolus D6 family

Cash Management
solutions

Sallén Obolus D6 family

Bringing high speed
and maximum
capacity in one
cash deposit unit



The high-speed range has been designed to adapt to the pace of big companies and provide greater performance and flexibility in all cash deposit transactions.

Today's economy has driven consumers to use less credit and more cash, growing the amount of paper

transactions worldwide. Manually managing the flow of currency into business, represents a high cost-low return task, which also carries significant security risks. Automation offers significant potential for increasing productivity of the entire process.

Retail solutions with CIT features

- For businesses dealing with many customers, employees and suppliers every day, the D6 is your best option.
- The capacity and speed of the deposit unit allow you to streamline cash flow, cut on time-consuming operations and ensure a secure environment for your customers and employees.
- Stacked banknotes in bag.
- Multicurrency in the same transaction.
- Multilanguage.
- Sallén One Time Code system to open the safe.
- Visual and tactile interface via colour touch screen.
- Real time accountancy of each transaction.
- With the D6 unit you can also benefit from a range of additional options, depending on your individual needs, the escrow functionality which enables the notes to be recovered after counting in case a user disagrees with the amount reported by the machine.
- Also available is installation through the wall to allow the opening of the safe from the rear side of the machine and note stacker with up to 3,000 notes stacked.



Different identification
formats



Gain control



Reduce costs



Store safely

Specifications

Model Specifications

| | D6 | D6s | D6c10000 | D6c4000 | D6e10000 | D6e4000 |
|---------------------------|------------------------------------|--------------|--------------|-------------|--------------|--------------|
| Note Capacity (up to) | 10000 | 3000 Stacked | 10000 | 4000 | 10000 | 4000 |
| Coin Capacity | N/A | N/A | 15kgs | 15kgs | N/A | N/A |
| Dimension (WxDxH) | 530x570x1209 | 530x570x1209 | 530x651x1209 | 530x570x950 | 530x570x1309 | 530x570x1050 |
| Weight Kg | 480-302 kg | 490-312 kg | 485-307 kg | Request | 312 kg | Request |
| Safe | CEN IV, UL Type | | | | UL Type | |
| 800x480 Touch Display | 4,3" | | | | | |
| Manual Deposit | Yes. Anti-fishing slot on the door | | | | | |
| Max. Power Specifications | 240 Watts. 110-240v. 50-60 Hz | | | | | |
| Storage Type | Thermo sealed bag | | | | | |

Standard features

| | | | |
|------------------------|---|-----------------------------|-----------------------------------|
| Deposit Speed | 300 banknotes/minute | Remote management | Users, Transactions, firmwares... |
| Multicurrency deposits | Yes | Remote note reader upgrade | Yes |
| Multilanguage | Yes | Remote data import & export | Yes |
| PC | Linux Embedded OS | Time settings | Supports NTP synchronisation |
| Software Platform | EMA (Easy Modular Assisted) | "Unified POS" standard | Yes |
| Network | Supports VPN and multi cloud communications | Certifications | CE, ROHS, ECB (banknote reader) |
| Operating temperature | 10o to 40oC | Humidity | 5%-95%, non condensating |

Options


| | | | |
|------------------|---------------------------------|--------------------------------|-----------------------|
| Bank Note Feeder | 250 banknotes capacity | One Time Lock | No |
| Receipt printer | 57mm paper width | Additional locks or ID devices | Please contact Sallén |
| Barcode Reader | 1D omnidirectional 1650 scans/s | Application customization | Please contact Sallén |

Cash Storage Options

Plastic bag



Dimensions

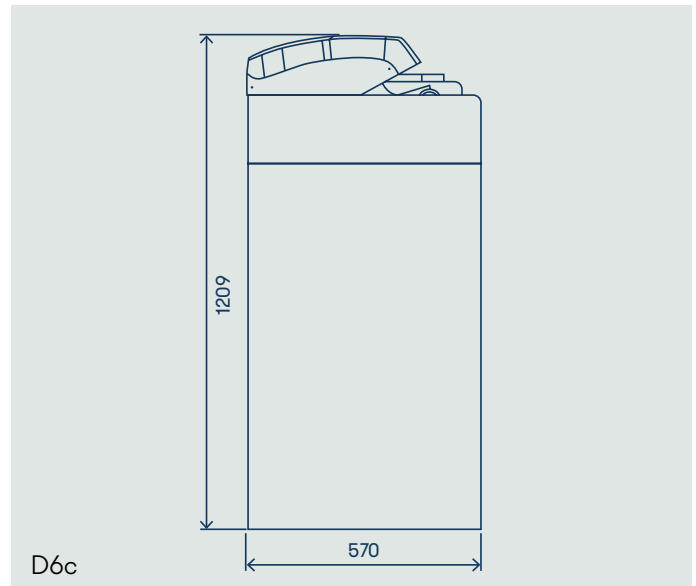

Our goal is to improve the cash cycle in all businesses, every day. So, we believe that by partnering up with all companies that want to make cash management an easy process, we can provide the solution that best meets their needs.

www.sallen.es

Cash management solutions / Obolus D6 family



A **GUNNEBO**® COMPANY

 **sallén**